


Product **M16 IP40 female cable connector, Contacts: 7, 6.0 - 8.0 mm, Shielding is not possible, solder, IP40**

Area **M16 IP40 series 680**  
Article number **09 0326 02 07**


**Illustration**



**Ritning**

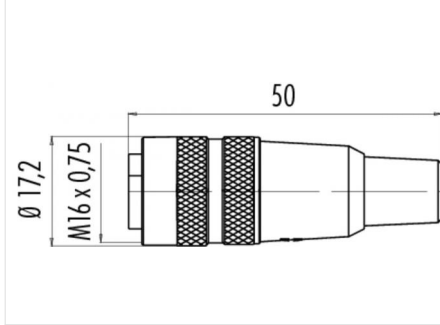

**Polbild**

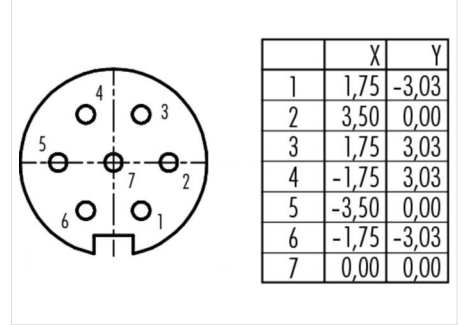

**Technical data**

**General features**

Kontaktdesign	female cable connector
Kontaktionslåsning	screw
Anslutning	solder
Tvårsnitt (mm)	0.75 mm <sup>2</sup>
Tvårsnitt (AWG)	18
Kabeluttag	6.0 - 8.0 mm
Övre gränstemperatur	85 °C
Lågre gränstemperatur	- 40 °C
Customs tariff number	85369010

**Electrical parameters**

Märkström (40°C)	5 A
Märkspänning	125 V
Märkstötspänning	800 V
Föroreningsgrad	1
Överspänningskategori	I
Isolermaterialgrupp	III
Resistans	≤ 5 mΩ
Insulation resistance	≥ 10 <sup>10</sup> Ω
EMV-behörighet	Shielding is not possible
Kapslingsklass	IP40
Mekanisk livslängd	> 500 Mating cycles

**Material**

Kontaktmaterial	CuSn (bronce)
Kontaktplätering	Ag (silver)
Kontaktkroppsmaterial	PBT (UL 94 V-0)
Kontaktusmaterial	PA

Product	<b>M16 IP40 female cable connector, Contacts: 7, 6.0 - 8.0 mm, Shielding is not possible, solder, IP40</b>
Area	<b>M16 IP40 series 680</b>
Article number	<b>09 0326 02 07</b>

## Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).