


Product **Snap-In IP40 cable connector, Contacts: 4, not shielded, moulded on cable, IP40, PVC black, 4 x 0.25 mm<sup>2</sup>**  
 Area **Snap-In IP40 series 709**  
 Article number **79 9003 12 04**


### Illustration



### Ritning

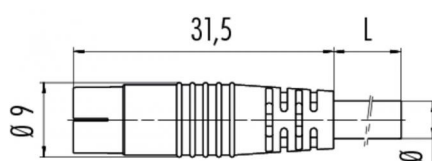

### Polbild

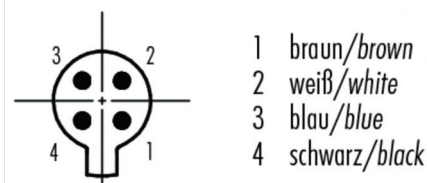

## Technical data

### General features

Kontaktdesign	cable connector
Kontaktionslåsning	snap
Anslutning	moulded on cable
Tvårsnitt (mm)	0.25 mm <sup>2</sup>
Tvårsnitt (AWG)	24
Övre gränstemperatur	70 °C
Lägre gränstemperatur	- 20 °C
Customs tariff number	85444290

### Cable data

Kabellängd	2 m
Mantelmateriäl	PVC
Isoleringsfläta	PVC
Trådkonstruktion	32 x 0,10 mm
Kabeldiameter	4.5 mm
Ledarmotstånd	80Ω/Km (20°C)
Fixerad böjningsradie kabel	22 mm
Rörlig böjningsradie kabel	45 mm

### Electrical parameters

Märkström (40°C)	3 A
Märkspänning	60 V
Märkstötspänning	800 V
Föroreningsgrad	1
Överspänningskategori	II
Isolermaterialgrupp	III
Resistans	≤ 3 mΩ
Insulation resistance	≥ 10 <sup>10</sup> Ω
EMV-behörighet	not shielded
Kapslingsklass	IP40
Mekanisk livslängd	> 100 Mating cycles

### Material

Kontaktmaterial	CuZn (brass)
Kontaktplätering	Au (gold)
Kontaktkroppsmateriäl	PA
Kontaktusmateriäl	PUR

Product	<b>Snap-In IP40 cable connector, Contacts: 4, not shielded, moulded on cable, IP40, PVC black, 4 x 0.25 mm<sup>2</sup></b>
Area	<b>Snap-In IP40 series 709</b>
Article number	<b>79 9003 12 04</b>

## Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.