




XXXXXXXXXX BXXXX/DIN XXXXXXXXXXXX



16 8105 000

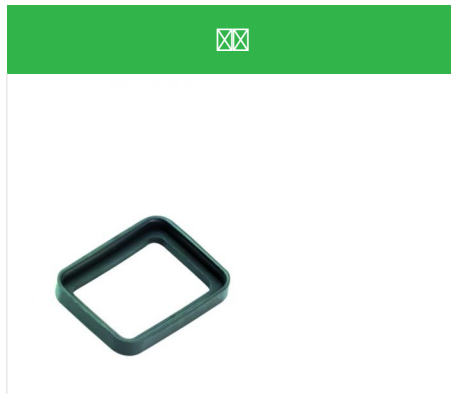

-20°C bis +125°C
schwarz



- 30 5535 300 000 - XXXXXXXXXXXX, XXXXXX, PUR 0.75 mm²
- 30 5535 500 000 - XXXXXXXXXXXX, XXXXXX, PUR 0.75 mm²
- 30 5537 300 510 - XXXXXXXXXXXX, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 30 5537 500 510 - XXXXXXXXXXXX, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 30 5539 300 520 - XXXXXXXXXXXX, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 30 5539 500 520 - XXXXXXXXXXXX, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 32 5335 300 000 - XXXXXX, DIN EN 175301-803, XXXXXX, PUR 0.75 mm²
- 32 5335 500 000 - XXXXXX, DIN EN 175301-803, XXXXXX, PUR 0.75 mm²
- 32 5337 300 510 - XXXXXX, DIN EN 175301-803, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 32 5337 500 510 - XXXXXX, DIN EN 175301-803, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 32 5339 300 520 - XXXXXX, DIN EN 175301-803, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 32 5339 500 520 - XXXXXX, DIN EN 175301-803, XXXXXX, PUR 0.75 mm², XXX, LED XXX
- 43 1800 000 03 - XXXXXX, DIN EN 175301-803, XXXXXX 6 - 8 mm, UL XXX
- 43 1830 000 03 - XXXXXX, XXXXXXXX, XXXXXX 6 - 8 mm, UL XXX
- 43 1830 004 03 - XXXXXXXXXXXX, XXXXXX, M16, XXXXXX 6 - 10 mm
- 43 1834 130 03 - XXXXXX, XXXXXXXX, XXX, LED XXX, XXXXXX 6 - 8 mm
- 43 1834 135 03 - XXXXXX, XXXXXXXX, XXX, LED XXX, XXXXXX 6 - 8 mm
- 99 5712 00 03 - XXXXXXXXXXXX M12 XXX
- 99 5718 00 03 - XXXXXXXX, DIN EN 175301-803, M12